



## SL 650

### Recessed luminaire for T5 lamps


- Housing and end caps made of sheet steel, powder-coated in RAL 9016 structure
- Double parabolic louvre, frosted acrylic diffuser
- Double parabolic louvre: VDU application suitable acc. to European Standards EN 12464-1
- Compatible pendant and surface mounted luminaires
- Also in continuous mounted version available



## SL 650


### Recessed luminaire with double parabolic louvre

Recessed luminaire with double parabolic louvre for T5 lamps. Housing and end caps made of sheet steel, powder-coated in RAL 9016 with structure. Double parabolic louvre made of high-polished metalised pure aluminium (Al 99.98). VDU application suitable acc. to European Standards EN 12464-1. Max. weight: 3,9 kg

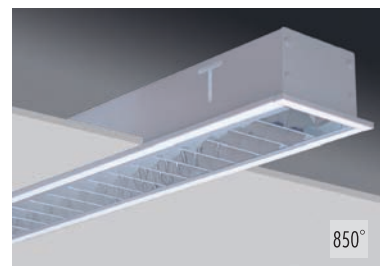

#### Surface: RAL 9016 structure

Version	High frequency ballast (HF)	Digital dimmable HF ballast (DALI)	Length x width x height	Ceiling cut-out	Recessed height	Socket type
T5 1 x 28 / 54 W	<b>650.581.54.3-10</b>	<b>650.581.54.6-10</b>	1225 x 120 x 82 mm	1210 x 105 mm	75 mm	G5
T5 1 x 35 / 49 / 80 W	<b>650.581.80.3-10</b>	<b>650.581.80.6-10</b>	1525 x 120 x 82 mm	1510 x 105 mm	75 mm	G5
T5 2 x 28 / 54 W	<b>650.582.54.3-10</b>	<b>650.582.54.6-10</b>	1225 x 120 x 82 mm	1210 x 105 mm	75 mm	G5



T5 2 x 54 W  
UGR 19 / 16,3  
Critical radiation angle/1000 cd/m<sup>2</sup> 65°  
Light output ratio 68%


#### Attachments (Please order separately!)

Emergency light kit 1h	<b>650.0901</b>
Emergency light kit 3h	<b>650.0900</b>
Special colour	<b>650.0090</b>
Double parabolic louvre matt-optic	<b>650.5241</b>

## SL 650



### Recessed luminaire with frosted acrylic diffuser

Recessed luminaire with frosted acrylic diffuser for T5 lamps. Housing and end caps made of sheet steel, powder-coated in RAL 9016 with structure. Max. weight: 3,9 kg

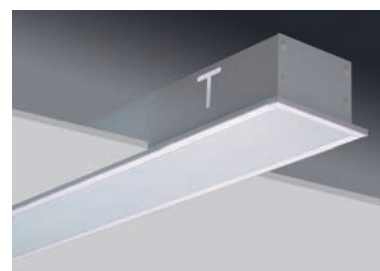

#### Surface: RAL 9016 structure

Version	High frequency ballast (HF)	Digital dimmable HF ballast (DALI)	Length x width x height	Ceiling cut-out	Recessed height	Socket type
T5 1 x 28 / 54 W	<b>650.591.54.3-10</b>	<b>650.591.54.6-10</b>	1225 x 120 x 82 mm	1210 x 105 mm	75 mm	G5
T5 1 x 35 / 49 / 80 W	<b>650.591.80.3-10</b>	<b>650.591.80.6-10</b>	1525 x 120 x 82 mm	1510 x 105 mm	75 mm	G5



T5 1 x 54 W  
UGR 20,1 / 19,2  
Critical radiation angle/1000 cd/m<sup>2</sup> 90°  
Light output ratio 66%

#### Attachments (Please order separately!)

Emergency light kit 1h	<b>650.0901</b>
Emergency light kit 3h	<b>650.0900</b>
Special colour	<b>650.0090</b>