




AS 19

Track light

- Luminaire made of aluminium die-cast, powder-coated in RAL 9006 with structure or RAL 9016 with structure
- Rotatable and adjustable
- Spherical facets reflector made of high-polished anodised pure aluminium (Al 99.98) with 3 different beam angles
- Lamp change without using of tools
- Incl. universal adapter for 3-phases track
- As surface mounted version available (ceiling rose on request)

AS 19

Track light for different lamps



Track light for low voltage halogen and high pressure lamps made of aluminium die-cast, powder-coated. Rotatable and adjustable. HIT-CE and HST-CRI (SDW-TG) c/w high frequency ballast, low voltage halogen c/w electronic transformer. Spherical facets reflector made of pure aluminium: spot, medium and flood. Incl. universal adapter for 3-phases track. Serial safety glass pane 18.901 for HIT-CE. Max. weight: 2.3 kg

Reflector: spot - 2 x 6°

Version	RAL 9006 structure	Length x width x height	Socket type
HIT-CE 35 W c/w HF ballast	19.453.35.23-18	165 x 155 x 275 mm	G12
HIT-CE 70 W c/w HF ballast	19.453.70.23-18	165 x 155 x 275 mm	G12
HIT-CE 150 W c/w HF ballast	19.453.15.23-18	225 x 155 x 225 mm	G12
HST-CRI (SDW-TG) 50 W c/w HF ballast	19.453.50.33-18	225 x 155 x 225 mm	GX12-1
HST-CRI (SDW-TG) 100 W c/w HF ballast	19.453.10.33-18	225 x 155 x 225 mm	GX12-1

Reflector: medium - 2 x 12°

Version	RAL 9006 structure	Length x width x height	Socket type
HIT-CE 35 W c/w HF ballast	19.463.35.23-18	165 x 155 x 275 mm	G12
HIT-CE 70 W c/w HF ballast	19.463.70.23-18	165 x 155 x 275 mm	G12
HIT-CE 150 W c/w HF ballast	19.463.15.23-18	225 x 155 x 225 mm	G12
HST-CRI (SDW-TG) 50 W c/w HF ballast	19.463.50.33-18	225 x 155 x 225 mm	GX12-1
HST-CRI (SDW-TG) 100 W c/w HF ballast	19.463.10.33-18	225 x 155 x 225 mm	GX12-1

Reflector: flood - 2 x 24°

Version	RAL 9006 structure	Length x width x height	Socket type
HIT-CE 35 W c/w HF ballast	19.473.35.23-18	165 x 155 x 275 mm	G12
HIT-CE 70 W c/w HF ballast	19.473.70.23-18	165 x 155 x 275 mm	G12
HIT-CE 150 W c/w HF ballast	19.473.15.23-18	225 x 155 x 225 mm	G12
HST-CRI (SDW-TG) 50 W c/w HF ballast	19.473.50.33-18	225 x 155 x 225 mm	GX12-1
HST-CRI (SDW-TG) 100 W c/w HF ballast	19.473.10.33-18	225 x 155 x 225 mm	GX12-1

Reflector: accord. to lamp bulb

Version	RAL 9006 structure	Length x width x height	Socket type
QR111 up to 100 W c/w transformer	19.403.10.63-18	165 x 155 x 275 mm	G53

If you require the luminaire in white (RAL 9016 structure) please use „-10“ instead of „-18“. For any other RAL colour use „-9“.

Spot - HIT-CE 70 W

h [m]	E(m) [lx]	Ø [m]
1,0	48620	0,20
2,0	12005	0,39
3,0	5336	0,59
4,0	3001	0,78
5,0	1921	0,98
▽α 2 x 6°		

Medium - HIT-CE 70 W

h [m]	E(m) [lx]	Ø [m]
1,0	14217	0,45
2,0	3554	0,90
3,0	1580	1,35
4,0	889	1,80
5,0	569	2,25
▽α 2 x 12°		

Flood - HIT-CE 70 W

h [m]	E(m) [lx]	Ø [m]
1,0	3675	0,85
2,0	919	1,71
3,0	408	2,56
4,0	230	3,41
5,0	147	4,27
▽α 2 x 24°		

Optics (You will find a detailed description on pages 234 up to 238!)



AS 19

Track light for mains voltage lamps



Track light for QT18 and Q-PAR 30 lamps made of aluminium die-cast, powder-coated. Rotatable and adjustable. Spherical facets reflector made of pure aluminium: spot, medium and flood. Incl. universal adapter for 3-phases track. Max. weight: 0.9 kg

Reflector: spot - 2 x 6°

Version	RAL 9006 structure	Length x width x height	Socket type
QT 18 up to 150 W	19.353.15.90-18	150 x 155 x 175 mm	B15d

Reflector: medium - 2 x 12°

Version	RAL 9006 structure	Length x width x height	Socket type
QT 18 up to 150 W	19.363.15.90-18	150 x 155 x 175 mm	B15d


Reflector: flood - 2 x 24°

Version	RAL 9006 structure	Length x width x height	Socket type
QT 18 up to 150 W	19.373.15.90-18	150 x 155 x 175 mm	B15d


Reflector: accord. to lamp bulb

Version	RAL 9006 structure	Length x width x height	Socket type
Q-PAR 30 up to 75 W	19.313.75.90-18	150 x 155 x 175 mm	E27

If you require the luminaire in white (RAL 9016 structure) please use „-10“ instead of „-18“. For any other RAL colour use „-9“.



Optics (You will find a detailed description on pages 234 up to 238!)

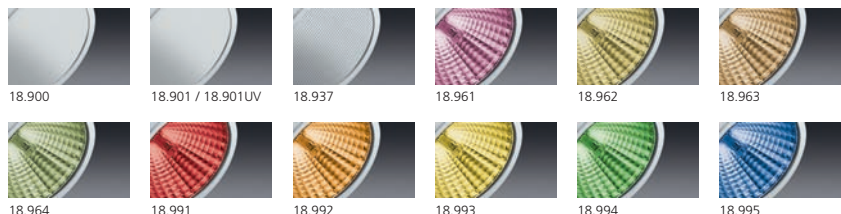

18.900

18.901 / 18.901UV

18.937

18.961

18.962

18.963

18.964

18.991

18.992

18.993

18.994

18.995