


## AS KA 12

Gimbal track light

- Gimbal luminaire heads made of die-cast aluminium, powder-coated in RAL 9006 with structure or RAL 9016 with structure
- Luminaire heads rotatable and adjustable
- Spherical facets reflector made of high-polished anodised pure aluminium (Al 99.98) with 3 different beam angles
- Lamp change without using of tools
- Incl. universal adapter for 3-phases track

# AS KA 12

Gimbal track light for HIT-TC-CE and low voltage halogen lamps



## Spot - HIT-TC-CE 35 W

h [m]	E(m) [lx]	∅ [m]
1,0	19660	0,20
2,0	4915	0,41
3,0	2184	0,61
4,0	1229	0,81
5,0	786	1,02
∇α 2 x 6°		

## Medium - HIT-TC-CE 35 W

h [m]	E(m) [lx]	∅ [m]
1,0	5205	0,41
2,0	1301	0,82
3,0	578	1,23
4,0	325	1,64
5,0	208	2,05
∇α 2 x 12°		

## Flood - HIT-TC-CE 35 W

h [m]	E(m) [lx]	∅ [m]
1,0	1581	0,98
2,0	395	1,95
3,0	176	2,93
4,0	99	3,90
5,0	63	4,88
∇α 2 x 24°		

Track light with two gimbal luminaire heads made of die-cast aluminium, powder-coated. Rotatable and adjustable. Control gear box mounted over luminaire heads. Spherical facets reflector made of pure aluminium: spot, medium or flood. Incl. universal adapter for 3-phases track. Serial safety glass pane 12.901 for HIT-TC-CE. Max. weight: 3.0 kg

### Reflector: spot - 2 x 6°

Version	RAL 9006 structure	Length x width x height	Socket type
HIT-TC-CE 20 W c/w HF ballast	<b>12.853.20.23-18</b>	320 x 120 x 190 mm	G8,5
HIT-TC-CE 35 W c/w HF ballast	<b>12.853.35.23-18</b>	320 x 120 x 190 mm	G8,5
HIT-TC-CE 70 W c/w HF ballast	<b>12.853.70.23-18</b>	320 x 120 x 190 mm	G8,5
QT 12 up to 50 W c/w transformer	<b>12.853.10.63-18</b>	320 x 120 x 190 mm	GY6,35

### Reflector: medium - 2 x 12°

Version	RAL 9006 structure	Length x width x height	Socket type
HIT-TC-CE 20 W c/w HF ballast	<b>12.863.20.23-18</b>	320 x 120 x 190 mm	G8,5
HIT-TC-CE 35 W c/w HF ballast	<b>12.863.35.23-18</b>	320 x 120 x 190 mm	G8,5
HIT-TC-CE 70 W c/w HF ballast	<b>12.863.70.23-18</b>	320 x 120 x 190 mm	G8,5
QT 12 up to 50 W c/w transformer	<b>12.863.10.63-18</b>	320 x 120 x 190 mm	GY6,35

### Reflector: flood - 2 x 24°


Version	RAL 9006 structure	Length x width x height	Socket type
HIT-TC-CE 20 W c/w HF ballast	<b>12.873.20.23-18</b>	320 x 120 x 190 mm	G8,5
HIT-TC-CE 35 W c/w HF ballast	<b>12.873.35.23-18</b>	320 x 120 x 190 mm	G8,5
HIT-TC-CE 70 W c/w HF ballast	<b>12.873.70.23-18</b>	320 x 120 x 190 mm	G8,5
QT 12 up to 50 W c/w transformer	<b>12.873.10.63-18</b>	320 x 120 x 190 mm	GY6,35

### Reflector: accord. to lamp bulb

Version	RAL 9006 structure	Length x width x height	Socket type
QR-CBC 51 up to 50 W c/w transformer	<b>12.813.50.63-18</b>	320 x 120 x 190 mm	GX5,3


If you require the luminaire in white (RAL 9016 structure) please use „-10“ instead of „-18“.  
For any other RAL colour use „-9“.

### Optics (You will find a detailed description on pages 234 up to 238!)

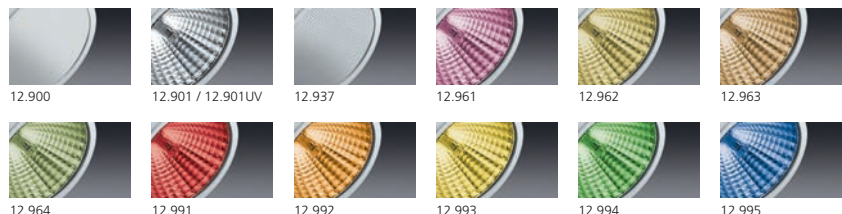

# AS KA 12

Gimbal track light for HIT-TC-CE and low voltage halogen lamps



Track light with one gimbal luminaire head made of die-cast aluminium, powder-coated. Rotatable and adjustable. Control gear box mounted over luminaire heads. Spherical facets reflector made of pure aluminium: spot, medium or flood. Incl. universal adapter for 3-phases track. Serial safety glass pane 12.901 for HIT-TC-CE. Max. weight: 1.5 kg

### Reflector: spot - 2 x 6°

Version	RAL 9006 structure	Length x width x height	Socket type
HIT-TC-CE 20 W c/w HF ballast	<b>12.753.20.23-18</b>	180 x 120 x 190 mm	G8,5
HIT-TC-CE 35 W c/w HF ballast	<b>12.753.35.23-18</b>	180 x 120 x 190 mm	G8,5
HIT-TC-CE 70 W c/w HF ballast	<b>12.753.70.23-18</b>	180 x 120 x 190 mm	G8,5
QT 12 up to 50 W c/w transformer	<b>12.753.10.63-18</b>	180 x 120 x 190 mm	GY6,35

### Reflector: medium - 2 x 12°

Version	RAL 9006 structure	Length x width x height	Socket type
HIT-TC-CE 20 W c/w HF ballast	<b>12.763.20.23-18</b>	180 x 120 x 190 mm	G8,5
HIT-TC-CE 35 W c/w HF ballast	<b>12.763.35.23-18</b>	180 x 120 x 190 mm	G8,5
HIT-TC-CE 70 W c/w HF ballast	<b>12.763.70.23-18</b>	180 x 120 x 190 mm	G8,5
QT 12 up to 50 W c/w transformer	<b>12.763.10.63-18</b>	180 x 120 x 190 mm	GY6,35

### Reflector: flood - 2 x 24°

Version	RAL 9006 structure	Length x width x height	Socket type
HIT-TC-CE 20 W c/w HF ballast	<b>12.773.20.23-18</b>	180 x 120 x 190 mm	G8,5
HIT-TC-CE 35 W c/w HF ballast	<b>12.773.35.23-18</b>	180 x 120 x 190 mm	G8,5
HIT-TC-CE 70 W c/w HF ballast	<b>12.773.70.23-18</b>	180 x 120 x 190 mm	G8,5
QT 12 up to 50 W c/w transformer	<b>12.773.10.63-18</b>	180 x 120 x 190 mm	GY6,35

### Reflector: accord. to lamp bulb

Version	RAL 9006 structure	Length x width x height	Socket type
QR-CBC 51 up to 50 W /w transformer	<b>12.713.50.63-18</b>	180 x 120 x 190 mm	GX5,3

If you require the luminaire in white (RAL 9016 structure) please use „-10“ instead of „-18“.  
For any other RAL colour use „-9“.

#### Spot - HIT-TC-CE 35 W

h [m]	E(m) [lx]	Ø [m]
1,0	19660	0,20
2,0	4915	0,41
3,0	2184	0,61
4,0	1229	0,81
5,0	786	1,02
∇α 2 x 6°		

#### Medium - HIT-TC-CE 35 W

h [m]	E(m) [lx]	Ø [m]
1,0	5205	0,41
2,0	1301	0,82
3,0	578	1,23
4,0	325	1,64
5,0	208	2,05
∇α 2 x 12°		

#### Flood - HIT-TC-CE 35 W

h [m]	E(m) [lx]	Ø [m]
1,0	1581	0,98
2,0	395	1,95
3,0	176	2,93
4,0	99	3,90
5,0	63	4,88
∇α 2 x 24°		

### Optics (You will find a detailed description on pages 234 up to 238!)

