



## EB 01

Recessed luminaire for effective accents

- Recessed luminaire with narrow beam angle  $2 \times 6^\circ$
- Housing made of galvanised sheet steel
- C/w remote gear box
- Lamp change without using of tools





## EB 01

Recessed luminaire for effective accents

Recessed luminaire with narrow beam angle for accent lighting. Die-cast ceiling trim, white powder-coated, adjustable without tools. Fixing of the bezel via bayonet lock. C/w toolless exchangeable remote gear box. Light-tight box made of galvanized steel sheet. Spherical facets reflector made of pure aluminium. Serial clear safety glass pane. Max. weight: 2,0 kg



Version	High frequency ballast (HF)	Diameter	Ceiling cut-out	Recessed height	Socket type
HIT-CE 35 W	<b>185.351.35.23</b>	187 mm	172 mm	125 mm	G12
HIT-CE 70 W	<b>185.351.70.23</b>	187 mm	172 mm	125 mm	G12

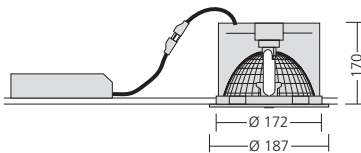

HIT-CE 35 W  
Half-value angle 2 x 6°  
Light output ratio 83%

h [m]	E [lx]	∅ [m]
1,0	34693	0,15
2,0	8673	0,31
3,0	3855	0,46
4,0	2168	0,62
5,0	1388	0,77

∑α 2 x 6°

### Attachments (Please order separately!)

Safety glass with integrated direct glare protection	<b>185.902</b>
--	----------------