



SL 650 XF

Extra shallow recessed luminaire for T5 lamps

- Housing and end caps made of sheet steel, powder-coated in RAL 9016 structure
- Double parabolic louvre, frosted acrylic diffuser
- Double parabolic louvre: VDU application suitable acc. to European Standards EN 12464-1
- Double parabolic louvre made of high-polished, metalised pure aluminium (Al 99.98).
- Recessed height: 50 mm

SL 650 XF – Recessed height 50 mm



Recessed luminaire with double parabolic louvre

Extra shallow recessed luminaire with double parabolic louvre for T5 lamps. Housing made of sheet steel, powder-coated in RAL 9016 with structure. Double parabolic louvre made of high-polished metalised pure aluminium (Al 99.98). VDU application suitable acc. to European Standards EN 12464-1. Max. weight: 3,8 kg



Surface: RAL 9016 structure

Version	High frequency ballast (HF)	Digital dimmable HF ballast (DALI)	Length x width x height	Ceiling cut-out	Recessed height	Socket type
T5 1 x 28 / 54 W	650.581.54.3XF	650.581.54.6XF	1225 x 121 x 57 mm	1210 x 105 mm	50 mm	G5
T5 1 x 35 / 49 / 80 W	650.581.80.3XF	650.581.80.6XF	1525 x 121 x 57 mm	1510 x 105 mm	50 mm	G5
T5 2 x 28 W	650.582.28.3XF	650.582.28.6XF	1225 x 121 x 57 mm	1210 x 105 mm	50 mm	G5
T5 2 x 35 W	650.582.35.3XF	650.582.35.6XF	1525 x 121 x 57 mm	1510 x 105 mm	50 mm	G5

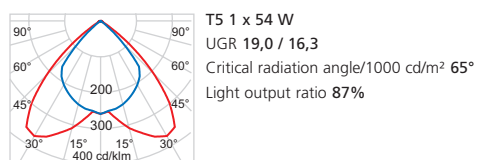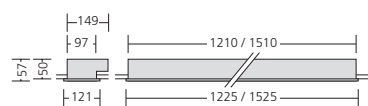

Attachments (Please order separately!)

Emergency light kit 1h	650.0901
Emergency light kit 3h	650.0900
Special colour	650.0090
Double parabolic louvre matt-optic	650.5241

SL 650 XF – Recessed height 50 mm


Recessed luminaire with frosted acrylic diffuser

Extra shallow recessed luminaire with frosted acrylic diffuser for T5 lamps. Housing made of sheet steel, powder-coated in RAL 9016 with structure. Max. weight: 3,8 kg



Surface: RAL 9016 structure

Version	High frequency ballast (HF)	Digital dimmable HF ballast (DALI)	Length x width x height	Ceiling cut-out	Recessed height	Socket type
T5 1 x 28 / 54 W	650.591.54.3XF	650.591.54.6XF	1225 x 121 x 57 mm	1210 x 105 mm	50 mm	G5
T5 1 x 35 / 49 / 80 W	650.591.80.3XF	650.591.80.6XF	1525 x 121 x 57 mm	1510 x 105 mm	50 mm	G5
T5 2 x 28 W	650.592.28.3XF	650.592.28.6XF	1225 x 121 x 57 mm	1210 x 105 mm	50 mm	G5
T5 2 x 35 W	650.592.35.3XF	650.592.35.6XF	1525 x 121 x 57 mm	1510 x 105 mm	50 mm	G5

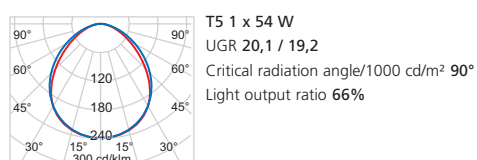

Attachments (Please order separately!)

Emergency light kit 1h	650.0901
Emergency light kit 3h	650.0900
Special colour	650.0090